

**FD-100 Folded Dipole HF Antenna**  
Commercial Series, 2-30Mhz Broadband Design

**DR** DIGITAL HF VOICE & DATA  
RADIO COMPATIBLE

**Product Information**

The Bushcomm FD-100 is a **High Power** compact, two wire folded dipole alternative to our best-selling model, the BBA-100 three wire broad-band antenna.


The FD-100 Folded Dipole covers the frequency range of 2-30Mhz, and has a rated power input of **130W PEP**. Best of all, as with the majority of our antennas, **no tuner is required**.

The Folded Dipole is a multi-wire that is relatively light in weight. By having only two stainless steel wires compared to the BBA-100's three wires, it also has less wind loading and an SWR of better than 2.5 (typically 1.5-1.6).




**Built to withstand the rigours of the world's harshest environments.**

**RECOMMENDED INSTALLATION CONFIGURATIONS**

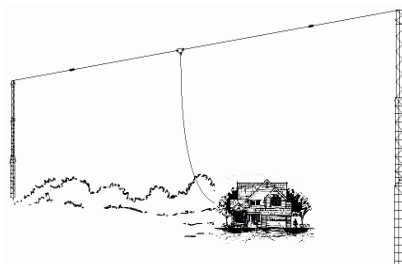

**ABOVE: HORIZONTAL CONFIGURATION**

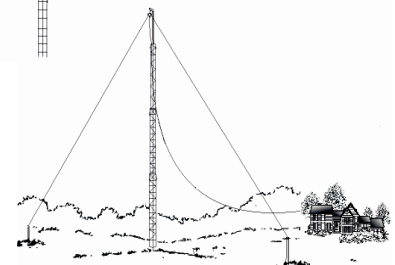

**ABOVE: INVERTED "V" CONFIGURATION**

**SPECIAL FEATURES**

- NO TUNER REQUIRED
- UV RESISTANT SPACER RODS
- UV RESISTANT BALUN/LOAD BOXES
- STAINLESS STEEL WIRE & FITTINGS

## Specifications:

### ELECTRICAL

Frequency Range: 2-30MHz  
Input Impedance: 50 Ohms  
Power Input: 130W PEP (voice) / 60W Continuous Data Modes  
Input Connector: UHF-type socket

### MECHANICAL

Shipping Weight: 3kg  
Antenna Length: 27m  
Mast Spacing: 29m Horizontal configuration  
18m inverted "v" configuration (with a 10m tower)

#### Contact:

Bushcomm Antennas  
21 River Road, Bayswater, WA, 6053  
Australia  
EMAIL: [sales@bushcommantennas.com](mailto:sales@bushcommantennas.com)  
WEBSITE: [www.bushcomm.com](http://www.bushcomm.com)  
PHONE: + 61 8 6144 3204  
FAX: +61 8 9378 4429

FOR FURTHER INFORMATION  
VISIT OUR WEBSITE  
**[www.bushcomm.com](http://www.bushcomm.com)**