

## **SWC-100S HF ANTENNA**

HF BROADBAND CENTRE-FED DIPOLE 3.0 - 30MHz

The SWC-100S is a commercial grade single wire broadband-Wideband dipole antenna designed for base staion or semi portable useuse.

The original SWC's that were first made over a decade ago are still going strong and have continually been improved and refined to ensure higher quality and durability than ever before.

The SWC-100S is 34m long, however, where space is limited. SWC-100S can be set up as an inverted "V" from either of the two sets of mounting points. At a mast height of 10m, this setup will have an average footprint of only 27m.

As with the majority of Bushcomm antennas the SWC-100S can be adapted to suit many different installation sites. It can be suspended horizontally, as an inverted Vee, or even as a sloper antenna.

Being a true Broadband/Wideband antenna, the SWC-100S covers the frequency range of 3.0-30MHz without using a tuner or coupler.

# **Product Brief**

### SPECIAL FEATURES

- \* 3.0 30MHz
- \* NO TUNER REQUIRED
- \* S/S Wire & Fittings
- \* UV Resistant balun/load boxes
- \* Easy Installation (instructions provided)
- \* High Power Data Model Avail. "SWC-100CS"



## **ALSO AVAILABLE:**

**SWC-100S - 34m long** SWC-100 - 48m long **SWC-100E - 60m long** 

125W High Power Digital Mode **Models Now Available** 

### **SPECIFICATIONS**

### **ELECTRICAL**

Frequency Range: 3.0-30 MHz Input Impedance: 50 OHM

Power Input: 130W PEP, 50 W Cont Input Connector: UHF - SO239 Socket

#### **MECHANICAL**

**Shipping Weight: Approx 2KG** 


Antenna Length: 34m



Left: Bushcomm Balun showing coaxial strain relief feature.\*\*\*\*

\*\*\*\* Coaxial cable not included, however it can be purchased separately.

### RECOMMENDED INSTALLATION CONFIGURATIONS

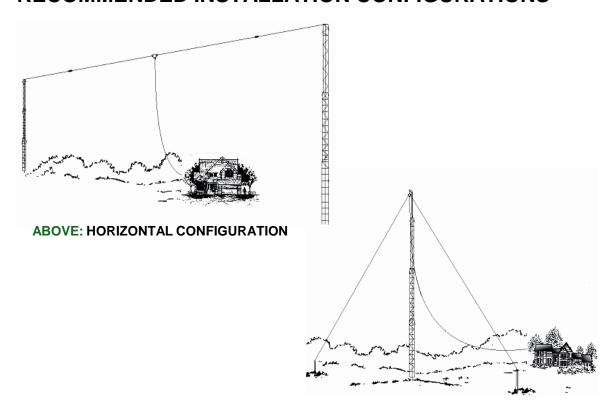

**ABOVE: INVERTED "V" CONFIGURATION** 

21 RIVER ROAD, BAYSWATER WA 6053

**AUSTRALIA** 

EMAIL: sales@bushcommantennas.com.au

WEBSITE: www.bushcomm.com **PHONE:** + 61 8 6144 3204

FOR FURTHER INFORMATION VISIT OUR WEBSITE www.bushcomm.com